




## ENDLESS POLYESTER ROUNDSLING


GLOBAL RIGGING AN SYNTHETIC'S ROUNDSLINGS ARE MADE IN AMERICA

### Features and Benefits

- Wear points can be shifted to extend life of sling
- Our most flexiable sling
- All slings have a 5:1 design factor

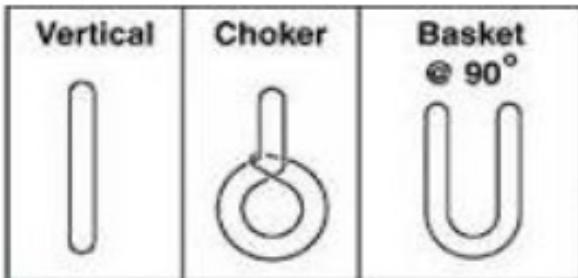

SLING PART #	VERTICAL WLL (LBS)	CHOKER WLL (LBS)	BASKET @ 90 DEGREES	Minimum Hardware Dia. ** (in)	Minimum length	Aprox. Weight/Foot	Aprox. Body Dia. Relaxed
GRS1 PURPLE	2,600	2,100	5,200	7/16	3	0.2	5/8
GRS2 GREEN	5,300	4,200	10,600	5/8	3	0.3	7/8
GRS3 YELLOW	8,400	6,700	16,800	3/4	3	0.5	1 1/8
GRS4 TAN	10,600	8,500	21,200	7/8	3	0.6	1 1/8
GRS5 RED	13,200	10,600	26,400	1	3	0.8	1 3/8
GRS6 WHITE	16,800	13,400	33,600	1 1/8	3	0.9	1 3/8
GRS7 BLUE	21,200	17,000	42,400	1 3/16	3	1.3	1 3/4
GRS8 ORANGE	25,000	20,000	50,000	1 1/2	4	1.5	2
GRS9 ORANGE	31,000	24,800	62,000	1 1/2	4	1.7	2 1/4
GRS10 ORANGE	40,000	32,000	80,000	1 1/2	6	2.2	2 1/2
GRS11 BROWN	53,000	42,400	106,000	2	6	2.8	2 3/4
GRS12 OLIVE	66,000	52,800	132,000	2 1/8	6	3.4	3 1/8
GRS13 BLACK	90,000	72,000	180,000	2 1/2	6	4.3	3 5/8
GRS14 BLACK	100,000	80,000	200,000	2 1/2	6	5.0	4 1/4

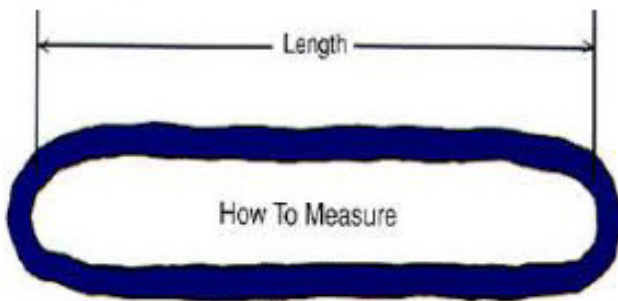

### WARNING

Do not exceed rated capacities.  
 Sling capacity decreases as the angle from horizontal decreases.  
 Slings should never be used at angles less than 30 degrees.

\*\* This is the smallest recommended connection hardware diameter to be used for a vertical hitch